


Product	Sinopec BLC-A Grease
Summary	Product description Sinopec BLC-A Grease is high temperature grease formulated with a lithium complex soap thickener and high-quality base oils. It contains rust and oxidation inhibitors, EP additives and molybdenum disulphide.

Available sizes

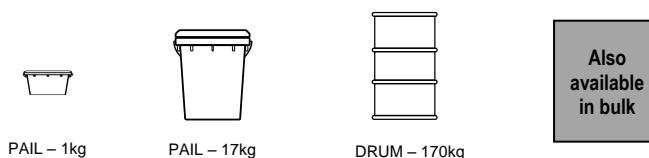

Applications

Sinopec BLC-A Grease is suitable for use in:

- High load parts of metallurgy, mining, engineering machinery and other industries.
- Application where the temperature range is from -40°C to 150°C.

Features and benefits

- Excellent high temperature performance to meet the lubrication requirements in high temperature conditions.
- Good water resistance means that the grease stays in place and is not washed or sprayed off in wet conditions, reducing the need for frequent re-application.

Typical data

Sinopec BLC-A Grease				
NLGI Grade	0	T0	1	2
Worked penetration(25°C), 0.1mm	370	358	330	280
Four ball EP, weld point, N, ASTM D 2596	4905			
Four ball wear,60 min @ 392N, mm, ASTM D 2266	0.39	0.42	0.45	0.49
Timken OK load, N, ASTM D 2509	222	222	222	222

These data are given as an indication of typical values and not as exact specifications.

Accuracy of information

Data provided in this PDS is typical and subject to change as a result of continuing product research and development. The information given was correct at the time of printing. The typical values given are subject to variations in the testing procedures and the manufacturing process may also result in slight variations. Sinopec guarantees that its lubricants meet any industry and OEM specifications referred to on this data sheet.

Sinopec cannot be held responsible for any deterioration in the product due to incorrect storage or handling. Information on best practice is available from your local distributor.

Product and environmental safety

This product should not cause any health problems when used in the applications suggested and when the guidance provided in the Material Safety Data Sheet (MSDS) is followed. Please consult the MSDS for more detailed advice on handling; MSDSs are available from your local distributor. Do not use the product in applications other than those suggested.

As with all products, please take care to avoid environmental contamination when disposing of this product. Used oil should be sent for reclamation/recycling or, if not possible, must be disposed of according to relevant government/authority regulations.

The SINOPEC trademark is registered and protected.

Issued: March 2017

© Sinopec 2017

Sinopec BLC-A Grease